

SMART MESH STRETCHING m/c

PAD EEN
INDUSTRIAL LTD

1006# No 2369-1 Rongle E Rd
Songjiang Dist. Shanghai
CHINA 201613

tel +86 21 5776-9285
fax +86 21 3325-0140
url www.padeen.cn
mail exp@padeen.cnmail

Model: SMS-1520S/1525S

Characteristics

- Double-slide-rail design to get small gap between clamps but with bigger tension;
- Easy manual stretch/rotate wheel;
- Easy to change the clamps' plastic rolls'
- 8 short clamps to avoid mesh breaking on 4-corner;
- Longer using life;

Parameters:

Model: SMS-1520S/1525S

Crossbeam Profile: 100x65mm

Clamp Slide-Rail: 2

Clamp Quantity: 36 pcs/40 pcs

Max Stretch Stroke: 90 mm

Max Stretch Size: 1500x2000 mm/1500x2500mm


Min Stretch Size: 1000x1000 mm

Max Tension: 30+5 N/cm

Lifting Cylinder: 6 pcs

Air Supply: 0.6 Mpa

Net Weight: 250 kg/300 kg

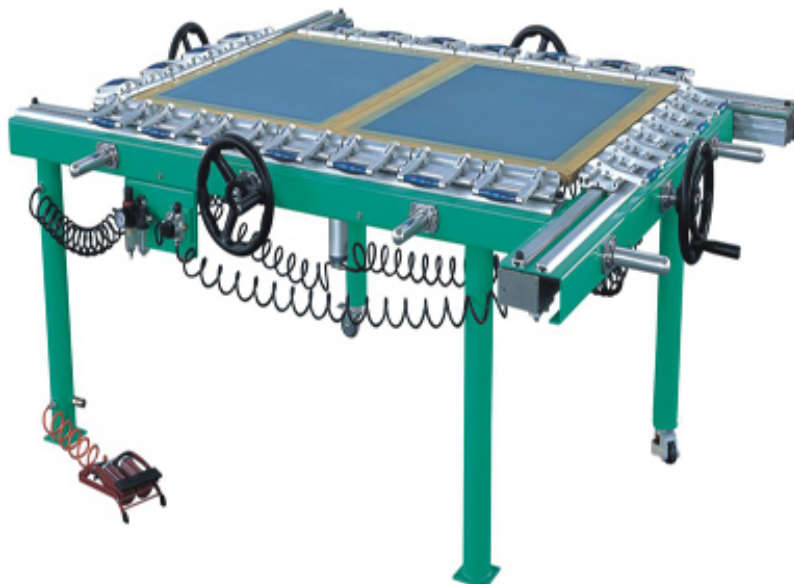



Packing List:

- Crossbeam with hand wheel: 4
- Leg: 4
- Clamp/21cm length: 28/32
- Clamp/16cm length: 8
- Lifting Cylinder: 6
- Air Adjustor: 1
- Adjustable Frame Support System: 1

all are packed in a wood case.

1006# No 2369-1 Rongle E Rd
Songjiang Dist. Shanghai
CHINA 201613

tel +86 21 5776-9285
fax +86 21 3325-0140
url www.padeen.cn
mail exp@padeen.cnmail